Electronic timers

1SBC101396F0014

TEF5-OFF

Description

TEF5 frontal electronic timers are used for realizing timing function and are available in ON-delay and OFF-delay versions.

Compact solution in cabinet compared to separate timers

TEF5 electronic timers are front-mounted and locked on A contactors or N contactor relays.
A mechanical indicator allows to show the state of the contactor.

TEF5 electronic timers are supplied by direct wiring to the coil terminals A1 - A2 of the contactor or contactor relay. A varistor is integrated on the timer to offer a built-in protection against surges in the contactor coil.

Available for a wide control voltage range 24...240 V AC / DC

TEF5-ON or TEF5-OFF allow time-delayed functions up to 100 s in 3 distinct time ranges, independently of the control system. The time delay ranges are selected by a switch and the time delay can be adjusted by means of a rotary switch. The timing function is activated by closing or opening the device on which the timer is mounted. The OFF-delay version operates without additional control supply.

Ordering details

For contactors, contactor relays	Time delay range selected by switch	Delay type	Rated control circuit voltage Uc V 50/60 Hz or DC	Auxiliary contacts	Type	Order code		Weight Pkg (1 pce) kg
A9 ... A75 N	0.1...1 s 1...10 s 10...100 s	ON-delay	24...240	1 1	TEF5-ON	1SBN020312R1000		0.065
		OFF-delay	24...240	1 1	TEF5-OFF	1SBN020314R1000		0.065

1SBC101894S0201

Electronic timers
Technical data

Contact utilization characteristics according to IEC

Types			TEF5-ON	TEF5-OFF
Standards			IEC 60947-5-1 and EN 60947-5-1	
Rated insulation voltage Ui				
acc. to IEC 60947-5-1			400 V	
Rated impulse withstand voltage Uimp			4 kV	
Rated operational voltage Ue max.			240 V	
Rated frequency (without derating)			50 / 60 Hz	
Conventional thermal current Ith - 40 °C			5 A	
Ie / Rated operational current AC-15				
acc. to IEC 60947-5-1		24-127 V 50/60 Hz	3 A	
		220-240 V 50/60 Hz	1.5 A	
Making capacity			10 x Ie AC-15 acc. to IEC 60947-5-1	
Breaking capacity			10 x Ie AC-15 acc. to IEC 60947-5-1	
Ie / Rated operational current DC-13				
acc. to IEC 60947-5-1		24 V DC	1 A / 24 W	
Short-circuit protection device gG type fuse			6 A	
Rated short-time withstand current Icw		for 1.0 s	8 A	
= 40 °C		for 0.1 s	8 A	
Minimum switching capacity			12 V / 3 mA	
with failure rate acc. to IEC 60947-5-4		24 V DC	10^{-7}	
Power dissipation per pole at 3 A			0.1 W	
Function diagram			ON-delay	OFF-delay
			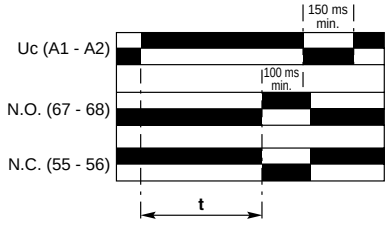	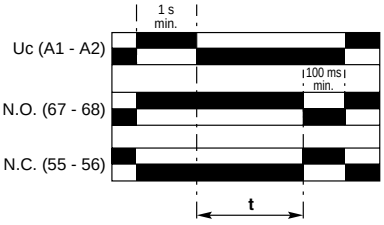
			Bistable relay inside. Before use, once apply Uc then switch it off in order to initialize position of the contacts.	
Control circuit voltage				
AC control voltage	Rated control circuit voltage Uc		24...240 V AC	
50/60 Hz	Average consumption		1.5 mA RMS	1 mA RMS
DC control voltage	Rated control circuit voltage Uc		24...240 V DC	
	Average consumption		1.5 mA	1 mA
Rated frequency limits			50 / 60 Hz	
Supply voltage range			0.85...1.1 x Uc (at 70 °C)	
Overvoltage protection			Varistor included	
Time delay range (t) selected by switch		0.1...1 s		
		1...10 s		
		10...100 s		
On-load reiteration accuracy under constant conditions			1 %	
Minimum ON period			0.1 s	1 s
Recovery time			0.15 s	0.1 s
Ambient air temperature	Operation		-25 °C ... +70 °C	
	Storage		-40 °C ... +80 °C	
Climatic withstand			Category B according to IEC 60947-1 Annex Q	
Maximum operating altitude			2000 m	
Mounting positions			Acc. to mounting positions permitted on contactors or contactor relays	
Shock withstand			1/2 sinusoidal shock for 11 ms: no change in contact position	
acc. to IEC 60068-2-27 and EN 60068-2-27			Same as contactor or contactor relay	
(Mounting position 1)				
Mechanical durability				
	Number of operating cycles		5 millions operating cycles	
	Max. switching frequency		3600 cycles/h	1800 cycles/h
Max. electrical switching frequency				
		AC-15	1200 cycles/h	
		DC-13	900 cycles/h	

1SBC101674S0201

Electronic timers
Technical data

Contact utilization characteristics according to UL / CSA

Types		TEF5-ON	TEF5-OFF
Standards		UL 508, CSA C22.2 N°14	
Rated insulation voltage Ui acc. to UL / CSA		300 V	
Max. operational voltage		240 V	
Pilot duty		B300, R300	
AC thermal rated current		5 A	
AC maximum volt-ampere making		3600 VA	
AC maximum volt-ampere breaking		360 VA	
DC thermal rated current		1 A	
DC maximum volt-ampere making-breaking		28 VA	

Connecting characteristics

Connection capacity (min. ... max.)		
Rigid solid	1 x	1...2.5 mm²
	2 x	1...2.5 mm²
Flexible with non insulated ferrule	1 x	0.75...2.5 mm²
	2 x	0.75...2.5 mm²
Flexible with insulated ferrule	1 x	0.75...2.5 mm²
	2 x	0.75...1.5 mm²
Lugs	L	8 mm
	I >	3.7 mm
Connection capacity acc. to UL / CSA	1 or 2 x	AWG 18...14
Stripping length		10 mm
Tightening torque		1 N.m / 9 lb.in
Degree of protection acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529		IP20
Screw terminals		Delivered in open position, screws of unused terminals should be tightened
All terminals		M3.5
Screwdriver type		Flat Ø 5.5 / Pozidriv 2
Terminal Marking		 

1SBC101674S0201

Mechanical and electrical interlock units

Description

When mounted between two contactors, the mechanical interlock unit prevents one of the contactors from closing as long as the other contactor is closed.

– VM interlock units for mechanical interlocking of two horizontal or vertical mounted AC or DC operated contactors
– VE interlock units for mechanical and electrical interlocking of two horizontal mounted AC or DC operated contactors.

1SBC580411F0301

VM300H

Ordering details (1)

Left side contactor	Right side contactor	Mounting	Type	Order code		Pkg qty	Weight (1 pce) kg
Mechanical interlock units for two horizontal mounted contactors (2)							
A9 ... A40	A9 ... A40	Rail mounting or mounting plate to be ordered separately (3)	VM5-1	1SBN030100R1000		1	0.066
A9 ... A40	A45 ... A110	See table below with VE5 type	–	–		–	–
A45 ... A75	A45 ... A110		–	–		–	–
A95 ... A185	A45 ... A110		–	–		–	–
A95 ... A185	A145 ... A300	Additional plate (not supplied)	VM300H	1SFN034700R1000		1	0.150
A210 ... A300	A145 ... A300		VM300H	1SFN034700R1000		1	0.150

1SBC580411F0301

VM300V

Up contactor	Down contactor	Mounting	Type	Order code		Pkg qty	Weight (1 pce) kg
Mechanical interlock units for two vertical mounted contactors (4)							
A95 ... A185	A145 ... A300	Additional plate (not supplied)	VM300V	1SFN034701R1000		1	0.150
A210 ... A300	A145 ... A300		VM300V	1SFN034701R1000		1	0.150

1SBC572822F0301

VE5-1

Left side contactor	Right side contactor	Mounting	Type	Order code		Pkg qty	Weight (1 pce) kg
Mechanical and electrical interlock units for two horizontal mounted contactors							
A9 ... A40	A9 ... A40	Rail mounting or mounting plate to be ordered separately (3)	VE5-1	1SBN030110R1000		1	0.076
A30 ... A75	A45 ... A75		VE5-2	1SBN030210R1000		1	0.146
A45 ... A75	A30 ... A75		VE5-2	1SBN030210R1000		1	0.146
A45 ... A75	A95 ... A110	Additional plate (not supplied)	VE5-2 (5)	1SBN030210R1000		1	0.146
A95 ... A110	A45 ... A75		VE5-2 (5)	1SBN030210R1000		1	0.146
A95 ... A110	A95 ... A110		VE5-2	1SBN030210R1000		1	0.146

(1) For each contactor type, refer to "Accessory tting details".
(2) Mechanical durability: VM5-1 = 5 millions cycles, VM300H = 1 million cycles.
(3) Rail mounting for: 2 x A9 ... A40 contactors only
2 x A30, A40 contactors + MMS.
PM26-23 mounting plate for: 2 x A9 ... A26 contactors + MMS.
(4) Mechanical durability: VM300V = 1 million cycles.
(5) The combination of A45 ... A75 contactors interlocked with A95, A110 contactors cannot be mounted on symmetrical rail (75 mm, IEC/EN 60715).

1SBC101895S0201

Mechanical and electrical interlock units

Technical data

Types	VE5-1	VE5-2

Contact utilization characteristics according to IEC

Standards		IEC 60947-5-1 and EN 60947-5-1
Rated insulation voltage Ui		
acc. to IEC 60947-5-1		690 V
Rated operational voltage Ue max.		24…690 V
Conventional thermal current Ith - 40 °C		16 A
Ie / Rated operational current AC-15		
acc. to IEC 60947-5-1	24-127 V 50/60 Hz	6 A
	220-240 V 50/60 Hz	4 A
	380-440 V 50/60 Hz	3 A
	500-690 V 50/60 Hz	2 A
Making capacity		10 x Ie AC-15 acc. to IEC 60947-5-1
Breaking capacity		10 x Ie AC-15 acc. to IEC 60947-5-1
Ie / Rated operational current DC-13		
acc. to IEC 60947-5-1	24 V DC	6 A
	48 V DC	2.8 A
	72 V DC	1 A
	125 V DC	0.55 A
	250 V DC	0.3 A
Short-circuit protection device - gG type fuse		10 A
Rated short-time withstand current Icw	for 1.0 s	100 A
= 40 °C	for 0.1 s	140 A
Power dissipation per pole at 6 A		0.15 W
Mechanical durability		
Number of operating cycles		5 millions operating cycles
Max. switching frequency		600 cycles/h

Utilization characteristics according to UL / CSA

Standards	UL 508, CSA C22.2 N°14
Max. operational voltage	600 V

Connecting characteristics

Connection capacity (min. ... max.)			
Rigid solid		1 x	1...4 mm²
		2 x	1...4 mm²
Flexible with ferrule		1 x	0.75...2.5 mm²
		2 x	0.75...2.5 mm²
Lugs		L <	8 mm
		I >	3.5 mm
Tightening torque	Recommended		1 Nm
	Max.		1.2 Nm
Degree of protection acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529			IP20
Screw terminals			Delivered in open position, screws of unused terminals must be tightened
All terminals			M3.5
Screwdriver type			Flat Ø 5.5 / Pozidriv 2
Terminal marking			

Technical note: when, during switching, the arc time is estimated to more than 40 ms, the closing signal of one of the two contactors must be delayed with respect to the opening signal of the other contactor in order to prevent a short-circuit.
Use a TEF5 or TE5S electronic timer according to application use with time lapse for A contators.

1SBC101896S0201

Electronic timer for star-delta starters

1SBC575582F0302

TE5S...



Chart

Description

When used in star-delta starters, the TE5S lags the star connection and provides a lapse of 50 ms before the switch over to delta connection.

According to the type of device chosen, the electronic circuit has a 24 V AC / DC, 110 to 120 V AC, 220 to 240 V AC or 380 to 440 V AC supply. An output relay with reversing contact ensures high current switching. A two-position switch allows selection of one of the two time delay ranges: 0.8 to 8 s or 6 to 60 s. The 0.1 to 1.0 graduated button allows an initial setting without steps within the previously selected range which can then be adjusted using a chronometer.

Note: We recommend that you allow for temperature drift for the final adjustment of the time delay setting. Drift: -0.2 % per °C.

For example, a setting made at 20 °C will yield a time delay shorter by 7 % at 55 °C in a cubicle (-0.2 % per °C i.e. -0.2 x 35 = -7 %).

Regardless of these settings the TE5S provides a fixed "lapse" of 50 ms between the opening of contact 15-16 and the closing of contact 15-18. This time delay prevents from arc short-circuit during star to delta switching.

Operation

On energization, the green U indicator light (voltage applied) comes on. Contact 15-16 then immediately moves to the closed position.

Count-down of the programmed time immediately commences. When the time delay has elapsed, contact 15-16 opens and at the same time the 50 ms lapse, t2, begins after which contact 15-18 moves to the closed position. The yellow R indicator light comes on.

On de-energization, the U and R indicator lights go out and, after the 250 ms resetting time, the device is ready for a new cycle.

Mounting

On 35 x 7.5 mm or 35 x 15 mm mounting rail according to IEC/EN 60715.



Equivalent diagram

Ordering details

For contactors	Rated control circuit voltage Uc		Type	Order code		Pkg qty	Weight (1 pce)
	V 50/60 Hz	V DC					kg
A9 ... A300	24	24	TE5S-24	1SBN020010R1001		1	0.080
	110...120	–	TE5S-120	1SBN020010R1002		1	0.080
	220...240	–	TE5S-240	1SBN020010R1003		1	0.080
	380...440	–	TE5S-440	1SBN020010R1004		1	0.080



Front face

Main dimensions mm, inches

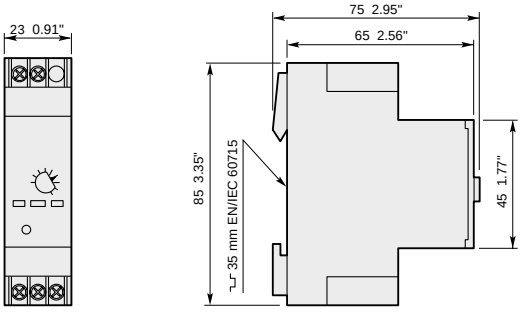

1SBC101523S0201

Electronic timer for star-delta starters

Technical data

Types			TE5S-24	TE5S-120	TE5S-240	TE5S-440
Utilization characteristics according to IEC						
Standards			IEC 60947-5-1 and EN 60947-5-1			
Rated insulation voltage Ui						
acc. to IEC 60947-5-1			440 V			
Rated operational voltage Ue max.			24 V DC			–
			24…240 V AC			440 V AC
Conventional free air thermal current Ith			10 A			
Ie / Rated operational current AC-15						
acc. to IEC 60947-5-1		24-120 V 50/60 Hz	5 A			–
		220-240 V 50/60 Hz	4 A			–
		380-440 V 50/60 Hz	–			3 A
Ie / Rated operational current DC-13						
acc. to IEC 60947-5-1		24 V DC	4 A			–
Short-circuit protection device - gG type fuse			10 A			
Control circuit voltage						
AC control voltage	Rated supply voltage Uc		24 V AC	110…120 V AC	220…240 V AC	380…440 V AC
50/60 Hz	Average consumption		1.5 VA	3.5 VA	6.5 VA	12.5 VA
DC control voltage	Rated supply voltage Uc		24 V DC	–	–	–
	Average consumption		0.7 W	–	–	–
Rated frequency limits			48…63 Hz			
Supply voltage range			0.85…1.1 x Uc			
Overvoltage protection			Built-in varistor			
Load factor			100 %			
Time delay range (t1) selected by switch			0.8…8 s and 6…60 s			
Temperature drift			-0.2 % per °C			
Mechanical setting accuracy			±15 % of the setting range			
On-load reiteration accuracy under constant conditions			±2 % after 1 million operating cycles			
Minimum time lapse (t2)			50 ms			
Minimum time lapse after 1 million of operating cycles			40 ms			
Resetting time (max.)			250 ms			
Front panel display		green indicator light	Energization			
		yellow indicator light	Output relay activated			
Ambient air temperature						
Operation			-25…+60 °C			
Storage			-40…+85 °C			
Shock withstand						
acc. to IEC 60068-2-27 and EN 6006-2-27						
		Shock direction				
		A	20 g / 11 ms			
		B	15 g / 11 ms			
		C	20 g / 11 ms			
Vibration withstand			10 to 300 Hz in the 3 directions			
acc. to IEC 60068-2-6 and EN 60068-2-6			3 g			
Mechanical durability			5 millions operating cycles			
Electrical durability			1 million operating cycles			
On-load maximum switching frequency			720 cycles/h			600 cycles/h
Fixing						
On rail according to IEC 60715, EN 60715			35 x 7.5 mm or 35 x 15 mm			

Connecting characteristics

Connection capacity (min. ... max.)			
Rigid solid		1 x	1...2.5 mm²
		2 x	1...2.5 mm²
Flexible with ferrule		1 x	0.75...2.5 mm²
		2 x	0.75...2.5 mm²
Tightening torque	Recommended		0.6 Nm
	Max.		0.8 Nm
Degree of protection			
acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529			IP20
Screw terminals			Delivered in open position, screws of unused terminals must be tightened
All terminals			M2.5
Screwdriver type			Flat Ø 4 / Pozidriv 1

1SBC101326S0201 - Rev. A

Surge suppressors for contactor coils



3

Description

The operation of inductive circuits causes overvoltages, in particular on opening of the contactor coil.

The electromagnetic energy stored in the coil during contactor closing is restored on opening in the form of surges, the slope and amplitude of which may rise to several kilovolts. A number of drawbacks are observed ranging from interference on the electronic devices to breakdown of insulators and even destruction of eer tain sensitive components.
The graph opposite reproduces the oscillogram showing voltage discharges at the terminals of a 42 V / 50 Hz coil without peak clipping. The coil was switched by 8 series-connected poles of a contactor relay.

Following a burst of discharges with a very steep slope a damped oscillation emerges with a peak value of 3500 V.

Overvoltage Factor
The overvoltage factor k is de ned as the ratio of the maximum overvoltage peak value Ûs to the peak value Ûc of the coil rated control voltage Uc:

$$k = \frac{\hat{U}s\ max.}{\hat{U}c} \qquad \text{in DC: } k = \frac{\hat{U}s\ max.}{Uc} \qquad \text{or in AC: } k = \frac{\hat{U}s\ max.}{Uc\ 2}$$

1SBC574001F0301

RV5/50

For example the following is obtained for the above graph: $k = \frac{3500}{42\ \ 2}$ 60

To reduce the harmful effects of these overvoltages, ABB has developed a range of surge suppressors designed to reduce the k factor de ned above and to limit or even completely eliminate the high pre-damping voltage frequencies.

Each case is different, but the technical data tolerances and the generous sizing of parts have enabled us to reduce the number of variants.

We have chosen the following solutions: transil diodes, varistors and RC blocks.

Note: A varistor is a resistor whose value decreases to a very large extent when a certain voltage is applied at its terminals.

1SBC573891F0301

RC5-1/50

Ordering details

For contactors	Rated control circuit voltage Uc V	AC	DC	Type	Order code		Pkg qty	Weight (1 pce) kg
A9 ... A110	24...50			RV5/50	1SBN050010R1000		2	0.015
	50...133			RV5/133	1SBN050010R1001		2	0.015
	110...250			RV5/250	1SBN050010R1002		2	0.015
	250...440			RV5/440	1SBN050010R1003		2	0.015
A9 ... A40	24...50		–	RC5-1/50	1SBN050100R1000		2	0.012
	50...133		–	RC5-1/133	1SBN050100R1001		2	0.012
	110...250		–	RC5-1/250	1SBN050100R1002		2	0.012
	250...440		–	RC5-1/440	1SBN050100R1003		2	0.012
A45 ... A110	24...50		–	RC5-2/50	1SBN050200R1000		2	0.015
	50...133		–	RC5-2/133	1SBN050200R1001		2	0.015
	110...250		–	RC5-2/250	1SBN050200R1002		2	0.015
	250...440		–	RC5-2/440	1SBN050200R1003		2	0.015
A145 ... A300	250...440		–	RC5-3/440	1SFN050300R1003		2	0.028

1SBC101899S0201

Surge suppressors for contactor coils

Technical data

Varistor	RV5/50	RV5/133	RV5/250	RV5/440
Rated control circuit voltage Uc	24...50 V AC	50...133 V AC	110...250 V AC	250...440 V AC
	24...50 V DC	50...133 V DC	110...250 V DC	250...440 V DC
Residual overvoltage (clipping voltage)	132 V AC	270 V AC	480 V AC	825 V AC
	132 V DC	270 V DC	480 V DC	825 V DC
Opening time growth factor	1.1...1.5			
Operating temperature	-20...+70 °C			
Connection to the coil terminals (parallel mounting)	Clip-on for both fixing and connection.			
Fixing	Clipped onto the top part of the contactor base without change in contactor overall dimensions.			
Advantages	High energy absorption: good damping - Unpolarized system.			
Drawback	Clipping as from Uvdr (1), thus voltage front up to this point.			

(1) Uvdr = Varistor operating voltage (voltage dependent resistor), tolerance ±10 %.

RC type	RC5-1/50	RC5-1/133	RC5-1/250	RC5-1/440
	RC5-2/50	RC5-2/133	RC5-2/250	RC5-2/440
	–	–	–	RC5-3/440
Rated control circuit voltage Uc	24...50 V AC	50...133 V AC	110...250 V AC	250...440 V AC
Residual overvoltage (clipping voltage)	2 to 3 x Uc max.			
Opening time growth factor	1.2...1.3			
Operating temperature	-20...+70 °C			
Connection to the coil terminals (parallel mounting)	Clip-on for both fixing and connection.			
Fixing	Clipped onto the top part of the contactor base without change in contactor overall dimensions.			
Advantages	Very fast clipping - Attenuation of steep fronts and thus of high frequencies. No operating delays.			

Wiring diagrams



Varistor



RC type

Dimensions

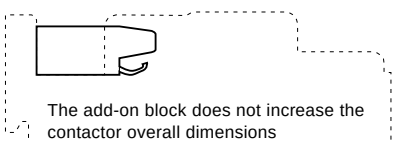

RV5, RC5

1SBC101900S0201

Interface relays

Description

RA5-1 interface relay is designed to receive 24 V DC signals delivered by PLC's or other sources with a low output power and to restore them with suf cient power to operate the coils of the relevant A9 ... A110 contactors.

RA5-1 interface relay is made up of a miniature electromechanical relay equipped with a N.O. contact and with a low consumption 24 V DC coil.

The interface relay coil is controlled by the PLC while the N.O. contact ensures switching of the power contactor.

Coil switching gives rise to overvoltages which have adverse effects on the electronic devices, insulators and, more generally, on component lifetime. The RA5-1 is equipped with surge suppressors:

– on the 24 V DC relay coil via a diode,
– on the power contactor coil via a varistor.

Furthermore, the RA5-1 is protected against relay pole reversal by a diode inserted between the E1 and E2 input terminals.

Ordering details

For contactors	Coil voltages V 50/60 Hz	Rated control circuit voltage Uc V DC	Type	Order code		Pkg qty	Weight (1 pce) kg
A9 ... A110	24...250	24	RA5-1	1SBN060300R1000		1	0.050
			RA5-1	1SBN060300T1000		10	0.050

1SBC101901S0201

Interface relays

Technical data

Type	RA5-1

Utilization characteristics according to IEC

Standards			IEC 60255-5
Rated insulation voltage Ui			
acc. to IEC 60947-4-1			250 V AC
Ambient air temperature			
In free air operation	at Uc = 24 V DC (between E1 and E2)		-25…+70 °C
	from 0.85 to 1.1 x Uc		-25…+55 °C
Storage			-40…+70 °C
Climatic withstand			Complies with that of associated contactors
Maximum operating altitude			3000 m
Mounting positions			No limitation
Fixing			Using the contactor A1 and A2 teminal connecting parts

Connecting characteristics

Connection capacity (min. ... max.)			
Rigid solid		1 x	1...4 mm²
		2 x	1...4 mm²
Flexible with ferrule		1 x	0.75...2.5 mm²
		2 x	0.75...2.5 mm²
Lugs		L <	8 mm
		I >	3.5 mm
Tightening torque	Recommended		1 Nm
	Max.		1.2 Nm
Degree of protection			Protection against direct contact in acc. with EN 50274
acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529			RA5-1 wired and mounted on the associated contactor
Screw terminals			Delivered in open position, screws of unused terminals must be tightened
All terminals			M3.5
Screwdriver type			Flat Ø 5.5 / Pozidriv 2

Working data

Surge suppression		
For contactor coil		Varistor
For interface relay coil		Diode
Protection against polarity reversal between terminals E1 and E2		Diode
Interface relay operating time		Closing and drop-out 10 ms
Total operating time, interface relay + contactor		
Between energization and:	N.O. contact closing	20…37 ms
	N.C. contact opening	17…32 ms
Between de-energization and:	N.O. contact opening	17…25 ms
	N.C. contact closing	20…28 ms

Electrical input data

Control voltage (E1 and E2 terminals) Uc		
Rated value		24 V DC
Max. range at ambient temperature 20 °C		19...30 V DC
Max. consumption for Uc = 24 V DC, = 20 °C		0.3 W
"0" status (relay open)	for Uc	2.4 V DC
	for Ic	< 1 mA
"1" status (relay closed)	for Uc	19 V DC
Max. short supply interruption immunity time		2 ms

Electrical output data

Switching voltage (A0 and A2 terminals)	250 V AC
Electrical durability	
Number of operating cycles	2 millions (600 cycles/h) on A9 ... A75 contactors or N contactor relays
	0.5 million (600 cycles/h) on A95 and A110 contactors

Connection



The "E1+" and "E2-" input terminals must be connected, according to their polarity, to the PLC output.
The RA5-1 is equipped with two terminal pads for connection to the A1 and the A2 terminals of the contactor coil.
This coil is supplied between the A0 and the A2 terminals of the RA 5-1.
Mounting: terminals pads clamped inside the contactor coil terminals.

1SBC101902S0201

Mechanical latching units



Terminal marking

Description

For converting standard contactors into latched contactors.

The WB75-A block contains a mechanical latching device with electromagnetic impulse unlatching (AC or DC) or manual unlatching.

Captive screw type connecting terminals, built-in cable clamps, M3.5 (+,-) pozidriv 2 screw with screwdriver guidance; delivered untightened and protected against accidental direct contact.

Operation

After closing, the contactor continues to be held in the closed position by the latching mechanism should the supply voltage fail at the contactor coil terminals.

Contactor opening can be controlled:

– electrically by an impulse (AC or DC) on the WB75-A block coil.
  (the coil is not designed to be permanently energized)
– manually by pressing the pushbutton on the front face of the WB75-A block.

Mounting

The WB75-A block is clipped onto the front face of the 1-stack contactor where it takes up two slots. The two other slots may accept CA5... single pole auxiliary contacts (1 block on each side of the mechanical latch).

Ordering details

For contactors	Rated control circuit voltage Uc		Type	Order code		Pkg qty	Weight (1 pce)
	V 50 Hz or DC	V 60 Hz					kg
A9 ... A75	24	24...28	WB75-A	FPTN372726R1001		1	0.120
	42	42...48	WB75-A	FPTN372726R1002		1	0.120
	48	48...55	WB75-A	FPTN372726R1003		1	0.120
	110	110...127	WB75-A	FPTN372726R1004		1	0.120
	220...230	220...255	WB75-A	FPTN372726R1006		1	0.120
	230...240	230...277	WB75-A	FPTN372726R1005		1	0.120
	380...415	380...440	WB75-A	FPTN372726R1007		1	0.120
	415...440	440...480	WB75-A	FPTN372726R1008		1	0.120

1SBC565483F0301

1SBC101903S0201

Mechanical latching units

Technical data

Type	WB75-A

Utilization characteristics according to IEC

Rated insulation voltage Ui acc. to IEC 60947-1		690 V
Max. electrical impulse time		
On AC coil (with load factor 5 %)		20 s
On DC coil (with load factor 3 %)		8 s
Min. electrical impulse time		
For latching (energizing of the contactor coil)	AC	50 ms
For pull-out (energizing of the WB block coil)	AC	30 ms
Coil operating limits	AC or DC supply	0.85…1.1 x Uc
AC control voltage 50/60 Hz		
Rated control circuit voltage Uc		24…480 V AC
Coil consumption	Average pull-in value	90 VA
	Average holding value	60 VA
DC control voltage		
Rated control circuit voltage Uc		24…440 V DC
Coil consumption	Average pull-in value	110 W
	Average holding value	110 W
Operating time		
On contactor closing (latching) Between coil energization and:		
	N.O. contact closing	No difference with the operation of a contactor without mechanical latching unit
	N.C. contact opening	No difference with the operation of a contactor without mechanical latching unit
On contactor opening (unlatching) Between WB coil energization and:		
	N.O. contact opening	5…25 ms
	N.C. contact closing	7…28 ms
Mechanical durability		
	Number of operating cycles	1 million operating cycles
Max. switching frequency		3600 cycles/h with on-load factor of 8 %

Connecting characteristics

Connection capacity (min. ... max.)			
Rigid solid		1 x	1...4 mm²
		2 x	1...4 mm²
Flexible with ferrule		1 x	0.75...2.5 mm²
		2 x	0.75...2.5 mm²
Lugs		L <	8 mm
		l >	3.5 mm
Tightening torque	Recommended		1 Nm
	Max.		1.2 Nm
Screw terminals			Delivered in open position, screws of unused terminals must be tightened
All terminals			M3.5
Screwdriver type			Flat Ø 5.5 / Pozidriv 2

1SBC101333S0201 - Rev. A

Function markers
Impulse contact blocks

BA5-50 function markers

1SBC57587.4F0301

BA5-50

Description

Set of 50 function markers designed to be clipped onto the front face of devices. Details can be added to these markers using a ball point pen, indelible felt-tip pen or pentel white.

Self-adhesive labels (not supplied) can also be added to them.

Marker dimensions: 7 x 19 mm (0.276" x 0.748").

Ordering details

For contactors	Type	Order code		Pkg qty	Weight (1 pce) kg
Contactors, thermal overload relays and accessories	BA5-50	1SBN110000R1000		1	0.017

CB5 impulse contact blocks

1SBC100039V0014

CB5

Description

Impulse contact blocks are designed for use in enclosures, in association with an adjustable mechanical pushbutton. Two types are available:

– CB5-10: N.O. contact with a black actuator ("ON" function)

– CB5-01: N.C. contact with a light grey actuator ("OFF" function).

These blocks are equipped with 2 connecting leads 0.5 mm² with end, approximately 18 cm long.

Mounting: Clipped onto the front face of the contactors.

Ordering details

For contactors	Contacts		Type	Order code		Pkg qty	Weight (1 pce) kg
A9 ... A110	1	–	CB5-10	1SBN010013R1010		1	0.012
	–	1	CB5-01	1SBN010013R1001		1	0.012

Main dimensions mm, inches

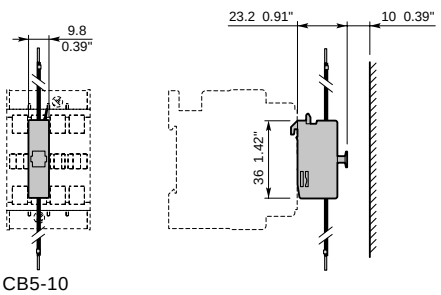

CB5-10

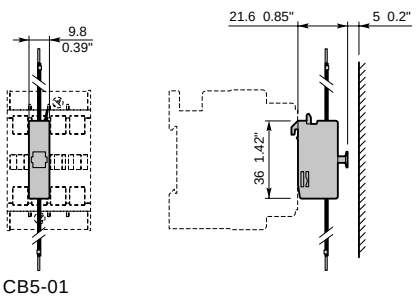

CB5-01

1SBC101898S0201

Terminal shrouds, terminal enlargements, terminal extensions Connector terminals

1SFT98099-019C3

LT...-AC

1SFT98099-125

LT...-AL

1SFT98000-014

LT...-AY

1SFT98000-011C3

LW...

1SFT98000-012C3

LX...

1SFT98099-00211C1

LZ...

1SFT98099-095C2

LZ...

1SBC580542F0302

LZ...

Terminal shrouds

Description

Main terminal protection for A145 ... A300 contactors.

The auxiliary contact blocks and coils are designed to provide an IP20 degree of protection.

The main terminals, equipped with lugs or connectors, can be protected against accidental direct contact after wiring (EN 50274) by the addition of terminal shrouds (see table below).

Ordering details

For contactors	Type	Order code		Pkg qty	Weight (1 pce) kg
A145 ... A185 with connectors	LT185-AC	1SFN124701R1000		2	0.050
A145 ... A185 with lugs	LT185-AL	1SFN124703R1000		2	0.220
A145 ... A185 with short. bar LY185 or between A145 and TA200DU or between A185 and TA200DU	LT185-AY	1SFN124704R1000		1	0.050
A210 ... A300 with connectors	LT300-AC	1SFN125101R1000		2	0.070
A210 ... A300 with lugs	LT300-AL	1SFN125103R1000		2	0.280
A210 ... A300 with short. bar LY300	LT300-AY	1SFN125104R1000		1	0.075

LW... Terminal enlargements

Description

Enlargement pieces designed to increase the width of the contactor terminal pads in order to allow larger connections to be mounted.

Sets containing 3 tin plated copper bars xed by an isolating spacer.

Ordering details

For contactors	Dimensions		Type	Order code		Pkg qty	Weight (1 pce) kg
	hole Ø mm	bar mm					
A95, A110	6.5	15 x 3	LW110	1SFN074307R1000		1	0.100
A145, A185	10.5	20 x 5	LW185	1SFN074707R1000		1	0.250
A210 ... A300	10.5	25 x 5	LW300	1SFN075107R1000		1	0.450

LX... Terminal extension

Description

Extension pieces designed to extend the main terminals of contactors for combined mounting of contactors and connection sets.

Sets containing 3 tin plated copper bars fixed by an isolating spacer.

Ordering details

For contactors	Dimensions		Type	Order code		Pkg qty	Weight (1 pce) kg
	hole Ø mm	bar mm					
A145, A185	8.5	20 x 5	LX185	1SFN074710R1000		1	0.250
A210 ... A300	10.5	20 x 5	LX300	1SFN075110R1000		1	0.350

Connector terminals

Description

Connection of copper and aluminium cables to the terminal pads of the poles of A contactors.

Ordering details

Cables	For contactors	Cable cross section mm²	Type	Order code		Pkg qty	Weight (1 pce) kg
Single Cu	A145, A185	6...185	–	1SDA023354R0001		3	0.200
	A210 ... A300	16...240	–	1SDA023368R0001		3	0.400
Single Al & Cu	A145, A185	35...95	–	1SDA023356R0001		3	0.100
	A145, A185	25...150	–	1SDA023357R0001		3	0.100
	A210 ... A300	120...240	–	1SDA023370R0001		3	0.200
Double Cu	A145, A185	2 x (50...120)	LZ185-2C/120	1SFN074709R1000		3	0.300
Double Al & Cu	A210 ... A300	2 x (95...120)	–	1SDA025766R0001		3	0.400

1SFC101153C0201

Voltage code table

The below tables indicate the available coil voltages and corresponding digits for order codes. When placing an order, please give the order code. Select a standard contactor from ordering detail pages. Change the coil voltage code in the order code according to the table below. Example: for contactor A50-30-00 and coil 48 V 50/60 Hz, the order code is 1SBL351001R8300.

A contactors



Order code

1SBL321001R 80 10

AC coil code
Contactors: A

	50 Hz	60 Hz
81	24 V	24 V
82	42 V	42 V
83	48 V	48 V
84	110 V	110...120 V
36	190 V	220 V
80	220...230 V	230...240 V
88	230...240 V	240...260 V
85	380...400 V	400...415 V
86	400...415 V	415...440 V

Codes in bold for dual frequency coils.

N contactor relays



Order code

1SBH141001R 80 40

AC coil code
Contactors: A

	50 Hz	60 Hz
81	24 V	24 V
82	42 V	42 V
83	48 V	48 V
84	110 V	110...120 V
36	190 V	220 V
80	220...230 V	230...240 V
88	230...240 V	240...260 V
85	380...400 V	400...415 V
86	400...415 V	415...440 V

Codes in bold for dual frequency coils.

1SBC101904S0201